

**ProFlash®**

# ROOF COLLARS

## LEAD FREE RUBBER BOOT COLLAR

### FOR PIPE PENETRATIONS ON TILED ROOFS

Roof Collars to seal pipe  
penetrations up to 330mm

- ✓ Lead free – No More Heavy Lifting
- ✓ Clean for the Environment
- ✓ Safer and Toxic Free
- ✓ UV Rated / Tested
- ✓ Complies with the AS/NZS 2904: 1995  
Damp Proof Courses and Flashings

**SEE OVER FOR SPECIFICATIONS**

### CALL FOR ALL SIZES AND FITTINGS

Phone: 03 9768 2394

Email: [info@aztecau.com.au](mailto:info@aztecau.com.au) – [www.aztecau.com.au](http://www.aztecau.com.au)

39 - 43 Deans Court Dandenong South, Victoria 3175

**ProFlash®**

# ROOF COLLARS

**Pro Flash Roof Collars** are a versatile solution for a range of pitched and flat roofing applications. The sticky back allows for compatibility with a wide range of roofing materials, providing a clean, traditional appeal with a 10 Year Warranty. When ProFlash® is installed by a qualified trades person, it will form a water-tight seal on your roof that will be long lasting and complete the seal from any water leakage.




## INSTALLATION BENEFITS

- ✓ Quick installation
- ✓ Easy to dress into shape by hand or soft hammer tool
- ✓ Easy to cut with scissors or knife if required
- ✓ No health risks such as lead poisoning or risks associated with lifting heavy materials

## NOTES:

- ✓ Avoid pressure load by sharp objects (eg. tile notches)

**Common Applications** – To seal and make water tight pipe penetrations on tiled roofs. The base material of ProFlash® Roof Collar complies with AS/NZS 2904:1995 Damp-proof courses and flashings. The ProFlash® Roof Collar exhibits great weathering and UV resistance thus guarantees the long-term performance for outdoor applications.

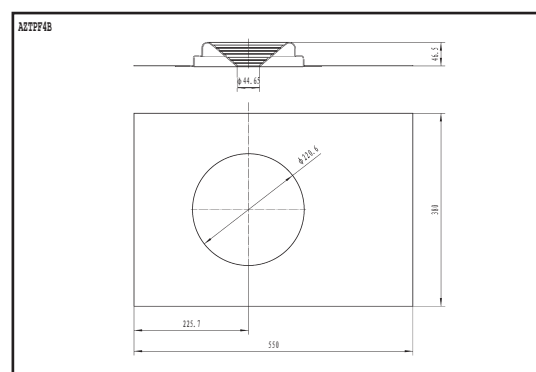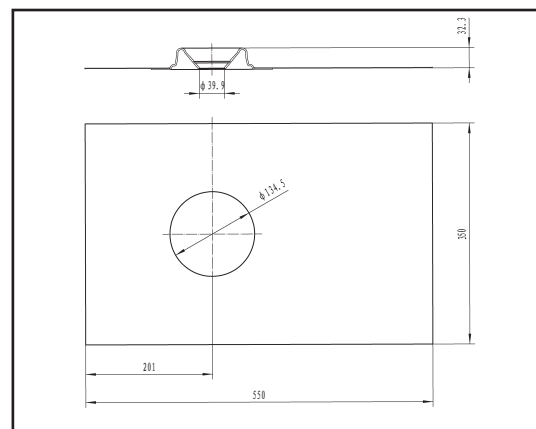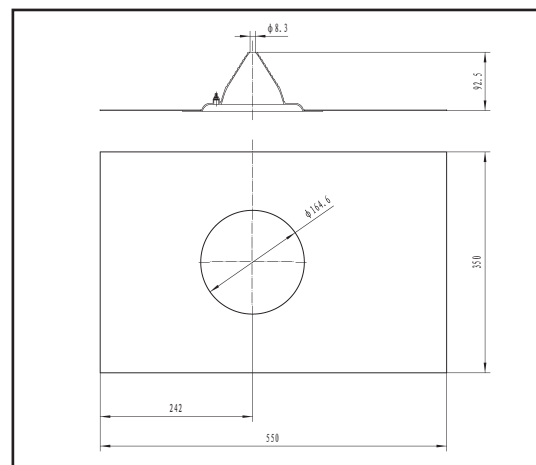

## Base Material Properties

Thickness, mm	1.9mm ~ 2.1 mm
Density	1.4 ~ 1.7 g/cm <sup>3</sup>
Tensile strength	≥ 2 MPa
Stretch ability	
Longitudinal	Up to 50%
Transverse	Up to 15%
Service Temperature	-40 °C to +100°C

## Product Range

Product Code	Description	Base Size	Boot Size
AZTPF1B	Aztec ProFlash Roof Collar 0 - 50mm Black	280 x 450mm	0 - 50mm
AZTPF2B	Aztec ProFlash Roof Collar 50 - 70mm Black	350 x 550mm	50 - 70mm
AZTPF3B	Aztec ProFlash Roof Collar 12 - 125mm Black	350 x 550mm	12 - 125mm
AZTPF4B	Aztec ProFlash Roof Collar 50 - 170mm Black	380 x 550mm	50 - 170mm
AZTPF5B	Aztec ProFlash Roof Collar 170 - 330mm Black	600 x 850mm	170 - 330mm

[www.aztecau.com.au](http://www.aztecau.com.au)

## CALL FOR ALL SIZES AND FITTINGS

Phone: 03 9768 2394

Email: [info@aztecau.com.au](mailto:info@aztecau.com.au) – [www.aztecau.com.au](http://www.aztecau.com.au)

39 - 43 Deans Court Dandenong South, Victoria 3175